

12-10-01

JC14 Rec'd PCT/PTO 05 NOV 2001 PCT

JC962 U.S. PTO  
11/05/01

FORM PTO-1390 (REV 10-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 205,383
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>10/009785</b>
INTERNATIONAL APPLICATION NO. PCT/UZ00/00001	INTERNATIONAL FILING DATE April 25, 2000	PRIORITY DATE CLAIMED May 5, 1999	
TITLE OF INVENTION METHOD FOR ATTENUATING A HEAT FLOW AND APPARATUS FOR PROTECTING A MONITOR OPERATOR			
APPLICANT(S) FOR DO/EO/US Mirvalil Khamitovich USMANOV, Nikolai Nikolaevich BROUSHLINSKI, Rustem Alievich ABUYAZIS, Yusup Uktamovich KASIMOV, Nikolai Petrovich KOPYLOV, Nikolai Borisovich LOBANOV, Shamil SADIKOV, Evgeny Alexandrovich SEREBRENNIKOV *)			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> <li><input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input checked="" type="checkbox"/> This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).</li> <li><input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).</li> <li><input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))               <ol style="list-style-type: none"> <li><input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li><input checked="" type="checkbox"/> has been communicated by the International Bureau.</li> <li><input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li><input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</li> <li><input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))               <ol style="list-style-type: none"> <li><input checked="" type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li><input checked="" type="checkbox"/> have been communicated by the International Bureau.</li> <li><input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li><input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li><input checked="" type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li><input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). - <b>unsigned</b></li> <li><input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>			
Items 11 to 16 below concern document(s) or information included:			
<ol style="list-style-type: none"> <li><input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li><input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li><input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li><input type="checkbox"/> A substitute specification.</li> <li><input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li><input type="checkbox"/> Other items or information:</li> </ol>			
*)Matrasul SABIROV, Anvar Davlyatovich KHUODOEV.			

11/10/01 10:00 AM J07 Rec'd PCT/PTO 05 NOV 2001

U.S. APPLICATION NO. <b>10/009785</b> INTERNATIONAL APPLICATION NO. <b>PCT/0200/00001</b>		ATTORNEY'S DOCKET NUMBER <b>205,383</b>	
17. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1000.00</b> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b> <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>		<b>CALCULATIONS</b> PTO USE ONLY  <div style="font-size: 2em; margin-top: 20px;">\$ 1,040.00</div>	
		<b>\$ 1,040.00</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		<b>\$</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	- 20 =		X \$18.00
Independent claims	- 3 =		X \$80.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>		<b>\$ 1,040.00</b>	
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.		<b>\$ 520.00</b>	
<b>SUBTOTAL =</b>		<b>\$ 520.00</b>	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		<b>\$</b>	
<b>TOTAL NATIONAL FEE =</b>		<b>\$ 520.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property		<b>\$</b>	
<b>TOTAL FEES ENCLOSED =</b>		<b>\$ 520.00</b>	
		Amount to be refunded:	\$
		charged:	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>520.00</u> to cover the above fees is enclosed.  b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.  c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>01-0035</u> . A duplicate copy of this sheet is enclosed.			
<b>NOTE:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.			
SEND ALL CORRESPONDENCE TO:  <b>HELLMAN FRAYNE &amp; SCHWAB</b> Attorneys at Law 150 East 42nd Street New York, NY 10017 (212) 949-9022		Nov. 5, 2001  <div style="text-align: center;">           SIGNATURE:          Joseph J. Catanzaro          NAME          25,837          REGISTRATION NUMBER       </div>	

10009785-051302  
JC07 Rec'd PCT/PTO 05 NOV 2001  
10/009785

PATENT DOCKET  
205,383

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): USMANOV, et al. Examiner: Not yet assigned  
Application: Not yet assigned Group Unit: Not yet assigned  
Filed: November 5, 2001 Docket No.: 205,383  
For: METHOD FOR ATTENUATING A HEAT FLOW AND  
APPARATUS FOR PROTECTING A MONITOR OPERATOR

PRE-EXAMINATION AMENDMENT

Hon. Commissioner of Patents and Trademark  
Washington, DC 20231

Dated: November 5, 2001

Sir:

Please amend the above-application as follows:

IN THE CLAIMS:

1. A method for attenuating a heat flow, which comprises forming a curtain of cooling liquid by supplying it in space formed of at least two surfaces with at least one of that is made as net, whose distinguishing feature is that the cooling liquid is supplied by means of controlled sprinkling or controlled spraying into the said space in order to form a vapour-drop-air medium between the said surfaces and the cooling liquid films on the said surfaces.
2. A method as claimed in claim 1, whose distinguishing feature is that a foam is used in addition when the number of curtains is more than one.

---

Statement of Filing by Express Mail 37 C.F.R. Section 1.10

This correspondence is being deposited with the United States Postal Service on November 5, 2001 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EF 174014883US, addressed to the Assistant Commissioner for Patents, Washington, DC 20231

3. (Amended). An apparatus for protecting of a monitor operator comprising a sprinkling assembly placed on the support attached to monitor casing and made in form of a frame of communicating tubes with the openings; the tubes are placed vertically and horizontally, wherein in the central part of the frame there is a aperture for the monitor; the sprinkling assembly is equipped by the two surfaces, at least one of the surfaces is made in the form of a net; these surfaces are attached on both sides of the frame at certain interval from each other, whose distinguishing feature is that there are sprayers for the fine dispersion of the cooling liquid, mounted in the openings of the tubes of the frame with an aim of forming a vapour-drop-air medium in the space between the surfaces and films of cooling liquid on the surfaces.

4. An apparatus as claimed in claim 3, whose distinguishing feature is that the nets are wattled and/or perforated and/or punched.

5. (Amended). An apparatus as claimed in claim 3, whose distinguishing feature is that the nets are made of powder metallurgy products.

6. (Amended). An apparatus as claimed in claim 3, whose distinguishing feature is that the nets are made of fireproof plastic.

7. (Amended). An apparatus as claimed in claim 3, whose distinguishing feature is that the nets are made of copper.

8. (Amended). An apparatus as claimed in claim 3, whose distinguishing feature is that the nets are made of a material coated by a metal film.


9. (Amended). An apparatus as claimed in claim 3, whose distinguishing feature is that the nets are made of galvanized steel.



REMARKS

The claims of the above-identified application have been amended to eliminate multiple dependencies. Examination of this application is respectfully requested.

Respectfully submitted,

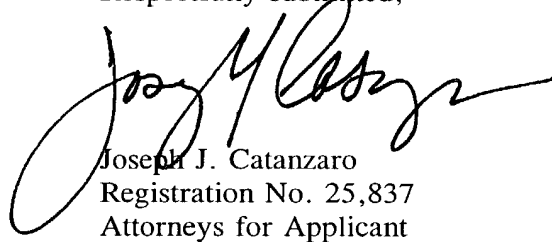

Joseph J. Catanzaro  
Registration No. 25,837  
Attorneys for Applicant

ABELMAN, FRAYNE & SCHWAB  
150 East 42nd Street  
New York, New York 10017-5612  
(212) 949-9022

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE CLAIMS

1. A method for attenuating a heat flow, which comprises forming a curtain of cooling liquid by supplying it in space formed of at least two surfaces with at least one of that is made as net, whose distinguishing feature is that the cooling liquid is supplied by means of controlled sprinkling or controlled spraying into the said space in order to form a vapour-drop-air medium between the said surfaces and the cooling liquid films on the said surfaces.
2. A method as claimed in claim 1, whose distinguishing feature is that a foam is used in addition when the number of curtains is more than one.
3. (Amended). An apparatus for protecting of a monitor operator comprising a sprinkling assembly placed on the support attached to monitor casing and made in form of a frame of communicating tubes with the openings; the tubes are placed vertically and horizontally, wherein in the central part of the frame there is a aperture for the monitor; the sprinkling assembly is equipped by the two surfaces, at least one of the surfaces is made in the form of a net; [theses] these surfaces are attached on both sides of the frame at certain interval from each other, whose distinguishing feature is that there are sprayers for the fine dispersion of the cooling liquid, mounted in the openings of the tubes of the frame with an aim of forming a vapour-drop-air medium in the space between the surfaces and films of cooling liquid on the surfaces.
4. An apparatus as claimed in claim 3, whose distinguishing feature is that the nets are wattled and/or perforated and/or punched.

5. (Amended). An apparatus as claimed in claim 3 [and 4], whose distinguishing feature is that the nets are made of powder metallurgy products.
6. (Amended). An apparatus as claimed in claim 3 [and 4], whose distinguishing feature is that the nets are made of fireproof plastic.
7. (Amended). An apparatus as claimed in claim 3 [and 4], whose distinguishing feature is that the nets are made of copper.
8. (Amended). An apparatus as claimed in claim 3 [and 4], whose distinguishing feature is that the nets are made of a material coated by a metal film.
9. (Amended). An apparatus as claimed in claim 3 [and 4], whose distinguishing feature is that the nets are made of galvanized steel.
10. An apparatus as claimed in claim 3, whose distinguishing feature is that the interval between the frame and the protective surfaces is 1-200 mm.
11. An apparatus as claimed in claim 3, whose distinguishing feature is that the frame is arranged at the forward part of the monitor and on its lateral parts.
12. An apparatus as claimed in claim 3, whose distinguishing feature is that the frame is arranged along the perimeter the monitor, and, if need be, at the ceiling and the floor.
13. (New). An apparatus as claimed in claim 4, whose distinguishing feature is that the nets are made of powder metallurgy products.
14. (New). An apparatus as claimed in claim 4, whose distinguishing feature is that the nets are made of fireproof plastic.



15. (New). An apparatus as claimed in claim 4, whose distinguishing feature is that the nets are made of copper.

16. (New). An apparatus as claimed in claim 4, whose distinguishing feature is that the nets are made of a material coated by a metal film.

17. (New). An apparatus as claimed in claim 4, whose distinguishing feature is that the nets are made of galvanized steel.

SPEC, CLAIMS, ABSTRACT, DRAWINGS

FOR NATIONAL PHASE 21 PAGES

JG07 Rec'd PCT/PTO 05 NOV 2001

PCT/UZ/00/00001

10/009785 MPK A 62 C

6/PRTS

205,283

## Method For Attenuating A Heat Flow And Apparatus For Protecting A Monitor Operator

This invention relates to the fire-prevention equipment and may be applied for protecting the equipment and people during fighting a fire, for dividing the area of buildings, ground and underground structures and apparatus into fire-checking sections, preventing fall of ceilings and intermediate floors, and stopping the spread of large fires entailing environmental catastrophe.

The method closest in terms of technical essence to the one proposed by present invention consist in creating a vertical fire protection curtain, which is formed by installation of metal nets arranged as two parallel surfaces and supply of cooling agent in the space between them. Water, water with surface-active substance or air-mechanical or chemical foam may be used as a cooling agent [1].

The disadvantage of the known method is that the only one protecting curtain and only one cooling agent used. This does not guarantee absolute safety when applied.

There exists apparatus attached to the monitor to protect from heat radiation [2]. It contains a sprinkling assembly, which consists of a V-shaped water stream splitter, two parallel plates, a mechanism for changing the angle between the plates of the V-shaped splitter. Water supplied under pressure through the monitor casing enters the sprinkling assembly. There it changes its direction and spreads over the plates forming two thin water films separated by the layer of air.

The disadvantage of this apparatus is that it requires a fixed pressure of water in order to maintain the aforementioned water films in a stable state.

However this condition is difficult to ensure since water pressure is not stable and difficult to control. Furthermore, the monitor cannot change its position, which is a disadvantage too.

The apparatus closest in terms of technical essence to the one proposed by present invention is described in [3]. It is attached to the monitor and contains a sprinkling assembly joined with the monitor casing. This sprinkling assembly is placed on the support and made in the form of a frame of communicating tubes placed both horizontally and vertically. There are openings for sprinkling water on the surface of the tubes, and in central part of the frame there is an aperture for vertical movement of the monitor nozzle. The frame equipped by two metal nets fixed on both side of the frame at some intervals; the lower part of the frame is equipped by rollers, which enable the frame to move along the support equipped by an arched guide for the rollers.

The disadvantage of this apparatus is that at any water pressure in the monitor water from openings on surface of tubes discharges in the form of thin streams. These streams disintegrate into drops only at the points where the streams bump against the frame and the metal nets. As a result the continuous water screen is not formed.

Another disadvantage of this apparatus is that it requires the use of both hands to turn the protecting screen horizontally. When such movement is performed, the reactive force created by the outgoing water sends the monitor into vertical random movement inside an aperture of the frame. This, in its turn, may bring undesirable consequences.

The objective of the present invention is to provide a higher efficiency heat flow attenuation method and an apparatus easier to use, which have a higher degree of safety and provides protection of a monitor operator against convection gas flows and the flows of heat and visible spectrum radiation .

The objective of the present invention is achieved by applying the heat flow attenuation method consisting in the creation of the fire protection curtain

by supplying a cooling agent in the space formed by at least two surfaces, with the difference that this curtain is created by means of controlled enlargement of the surface of interaction of a cooling agent with the flows of heat and visible spectrum radiation (e.g. by means of controlled sprinkling or controlled spraying the liquid or ejecting a compressed gas or bubbling).

When more than one curtain is formed, a combined supply of cooling liquid is used.

At least one of the curtains is formed by spraying the liquid, whereas the rest ones by supplying air-mechanical or chemical foam.

The objective of the present invention is also achieved by using sprayers designed for spraying the cooling liquid into fine-disperse states and attached the openings of the tubes of the frame of the apparatus, which is designed to protect of a monitor operator and contains sprinkling assembly (placed on the support connected with the monitor casing and made in the form of a frame of communicating tubes arranged both horizontally and vertically and having openings on their surfaces), an aperture for monitor casing in central part of the frame, and protective surfaces (e.g. nets) fixed at some interval along both sides of the frame.

The nets are wattled and/or perforated and/or punched.

The nets are made of powder metallurgy products.

The nets are made of fireproof plastic.

The nets are made of copper.

The nets are made of a material coated by a metal film.

The nets are made of a galvanized steel.

The size of a net cell is  $0.1 \times 0.1 - 8.0 \times 8.0$  mm.

An interval between the frame and protective surface is 1-200 mm.

The characteristics of the external net (the diameter of a wire, the material, the size of a cell, the type: wattled, perforated, punched) are identical with those of the internal net.

The characteristics of the external net (the diameter of a wire, the material, the size of a cell, the type: wattled, perforated, punched) are different from those of the internal net.

The frame is arranged at the forward part of the monitor and at its sides.

The frame is arranged along the perimeter around the monitor, and, if need be, at the ceiling and the bottom of it.

The essence of the present invention lies in fact that the cooling liquid is supplied between the protective surfaces in the form of a flow of the separate drops formed by means of special sprayers. This sprayed flow is characterised by the dispersity of liquid, the size of drops, distribution of the drops over the cross-section, the taper angle, the action range, the liquid pressure at the sprayer, and the quantity of consumed liquid. In practice centrifugal, pneumatic and mechanical ways of spraying are widely used [4].

The average diameter of drops decreases with an increase of the liquid pressure at the sprayer.

The fire pumps supply water under a pressure of 1.2 MPa; in so doing the average diameter of sprayed liquid drops is equal 400-500 micron. When devices of high pressure are used the differential in pressure inside sprayers may reach 15 MPa; in this case the diameter of drops may be reduces to 5-10 micron. Absorbing the heat radiation, the drops of sprayed liquid are starting to evaporate when they approach the protective surfaces as well as come in contact with these surfaces; it is enhanced by the fact that the drops of liquid with high kinetic energy are reflected repetitively from protective surfaces in space between them. The type and material of the protective surfaces, e.g. in the form of nets, their characteristics, the size of the nets cell, diameter and the material of the wire, etc. are chosen so that a cooling liquid film is being formed as a result of surface tension. The consistency of the film is maintained by dynamic equilibrium between the process of its evaporation, while heat energy is

absorbed, and the process of constant supply the liquid into the film, when the sprayed liquid drops bump against the film.

Thus, there is a medium formed of vapour, cooling liquid drops and air (a vapour-drop-air medium) in the space between the surfaces. The flows of heat and visible spectrum radiation, as well as convection gas flows is partly reflected from these surfaces (e.g. from the nets), from the cooling liquid films and the vapour-drop-air medium. In addition the heat energy is partly absorbed by these films and medium and "channelled" perpendicularly to the direction of the attacked heat flow movement.

It is obvious that the symbiosis of the above-mentioned processes of reflection and absorption determines one unique feature of the apparatus under consideration: the efficiency of the screening effect against the attacking heat flow increases along with growth of the intensity of this heat flow.

The spraying of the cooling liquid into fine dispersion state by means of the high pressure devices, so that diameters of drops are comparable with the wavelengths of heat radiation (1.5-7 micron), also adds to the increase in the heat flow screening efficiency by the apparatus under consideration. In accordance with the laws of geometrical optics, the scattering of the heat radiation increase several times if dispersity of the liquid drops are optimal [5].

The necessity of controlling the quantity  $M$  of cooling liquid supplied into the space between protective surfaces (they may be made of metal fabric, glass fabric, metal plates or other materials) is caused by considerable variation of the value of heat flows  $W$  which take place at fires (from 0 to 200-250 kw/m<sup>2</sup>). A special protection is required for fire-fighters if  $W \cong 3-4$  kw/m<sup>2</sup>.

Let us assume that the heat flow  $W_0$  falls perpendicularly on the surface of the fire protection screen:

$$W_0 = W_1 + W_2 + W_3$$

where  $W_1$  is the part of heat flow reflected from the screen,  $W_2$  is the part of heat flow penetrated through the screen,  $W_3$  is the part of heat flow absorbed

by the cooling liquid of the screen. Obviously, with the changing of  $M$ ,  $W_3$  is changed mostly.

Let us consider a hypothetical case where the heat flow  $W_0$  is totally absorbed by the cooling agent (by the water in particular).

Let us assume that 100 gm. of water is sprayed into the 1 m<sup>2</sup> space between the screen nets. Let us estimate the  $W_0$  assuming that the heating up to 100°C as well as vaporisation run during 1 second.

In this case

$$Q_0 = Q_h + Q_s$$

where

$Q_0$  is the total quantity of heat,

$Q_h = CM(t_2 - t_1)$  is the quantity of heat required for the heating from temperature  $t_1 = 0^\circ\text{C}$  to temperature  $t_2 = 100^\circ\text{C}$  of 100 gm. of water with specific heat  $C = 4.2 \text{ kJ kg}^{-1} \text{ deg}^{-1}$ ,

$Q_s = \lambda M$  is the vaporisation heat,

$\lambda = 22.6 \cdot 10^2 \text{ kJ/kg.}$  is the specific evaporation heat of water.

$$Q_0 = 4.2 \cdot 10^4 \text{ j} + 22.6 \cdot 10^4 \text{ j.}$$

Notice that  $Q_s$  is more than  $Q_h$  by the factor of 5.

For the case under consideration such value of  $Q_0$  corresponds to  $W_0 = 268 \text{ kw/m}^2$ .

Heat flows with such volume of  $W_0$  are seen at large fires on timber warehouses. When a gas gusher is in flame, the heat flow may be as much as 30-40 kw/m<sup>2</sup>. Largest attenuation of  $W_0$  by vapour-drop-air medium can be obtained if the average diameter of water drops is comparable to the wavelength of the heat radiation (5-10 micron) [5].

In this case a 5-7 times attenuation was achieved experimentally. Since speed of water drops was 10 - 100 m/sec, the process of steam generation is of little significance for the absorption of heat.

In the case where a curtain with two nets placed at some interval is employed, the water drops are reflected repeatedly from surfaces of the nets in the space between of them. This phenomenon is accompanied by the following processes: slowing of the speed of drops, splitting of drops into more fine ones, adhering of some drops on the nets. As a result of the aforementioned process there appears a water film on the surface of the net wire, besides, a water film is formed the net cells if the size of the net cells allows it. Owing to these processes, the absorption of the attacking heat flow increases since it goes on heating and evaporation the drops and films of water. Besides, the two protecting surfaces increase the process of dissipation and reflection of heat flows and convective gas flows – *W1*. This dissipation and reflection is effected both by the nets and the water film, formed on the net surface, as well as by a vapour-drop-air medium formed in the space between the nets.

When the water drops collide with the protecting nets, drops split into even finer ones; several of those go out of the space between the net surfaces. Fine-dispersed water splashes, passed through the forward net (it is arranged on the side of the falling of the heat flow) and evaporating water steam form a visually observable layer consisting of a vapour-drop-air medium and adjacent to the external surface of the frontal net, facing towards the fire.

The interaction between the convection flows of hot gases, falling on the frontal net surface facing towards the fire and reflected from them with this external layer of vapour-drop-air medium causes the visually observable



unstable pulsation of this medium and “running” down of heat energy along the frontal net surface in direction that is perpendicular to the direction of the vector of the heat flow ( $W_0$ ) expansion.

Thus, the proposed method for attenuating a heat flow differs essentially from the known ones. It qualitatively changes the situation in cases when the process of absorption and evaporation begin to play a considerable role in attenuation of heat flows. As was shown by the above calculations, theoretically these processes are capable to solve the problem of protecting from heat affection even at largest fires. It should be noted that in this method  $W_1$  and  $W_2$  increase with increasing  $W_0$ , i.e. during the functioning of the screen there is a self-regulating attenuation of the falling heat flow. At the same time, the present invention makes for the regulation of this process by artificial means, since the degree of attenuation of the falling heat flow essentially depends on the processes of absorption and evaporation. This regulation may be performed either automatically (by means of computer program, receiving data from the heat sensor) or manually. Experimentally, the regulation was performed by closing and opening of some of the sprayers, supplying water into the space between the nets, or by changing the pressure of water or any other cooling agent. The artificial regulation of attenuation of the falling heat flows makes possible obtaining the desired attenuation of  $W_0$  with economical consumption of water, that is used for forming and maintaining the vapour-drop-air medium.

The addition of colour agents to the supplied liquid, increases the efficiency of the heat screening by the present device, since in this case the absorptivity of falling energy by the vapour-drop-air medium will increase [7].

When the sprinkling assembly is made as a system of sprayers arranged by special way on the frame, it allows to ensure a homogeneous distribution of drops of the liquid in the space between the surfaces, or the nets, that fixed on both side of the frame at some interval from each other.

If the protecting screen is made in the form of a semicircle, it allows to protect the monitor operator against hazardous factors of fire at the front and the sides. In order to put out a fire on especially dangerous objects, the screen may be arranged along the perimeter of the monitor as well as on top of it. In this case the monitor operator will be screened from the front, the sides, the rear and from above.

If all the construction is placed on the wheeled flat-car, it will make it easily movable. If it is equipped with a drive, it will make the construction mobile.

The invention is illustrated by drawings: Figure 1 shows the general view of the steady-state apparatus for protecting a monitor operator (this is one of the option for the realisation of the above-mentioned heat flow attenuation method); Figure 2 shows a top view of the apparatus; Figure 3 shows a fragment of the sprinkling assembly with sprayers (View A of Figure 1); Figure 4 shows a side view of the apparatus; Figure 5 shows a top view of the apparatus with a screen located round the periphery of the monitor operator; Figure 6 shows the apparatus equipped with wheels and a drive.

The apparatus for protecting a monitor operator by means of the fire protection screen include the monitor 1 on the support 2. The support analogous with that of the monitor or the frame of the sprinkling assembly can be used in capacity of the latter. The sprinkling assembly is made in the form of a frame 3 of communicating tubes 4 placed both horizontally and vertically. The tubes 4 are equipped with sprayers 5. In central part of the frame there is an aperture 6 for vertical movement of the monitor nozzle 1. The frame 3 equipped by two metal nets 7 and 8, which are fixed on both side of the frame at some intervals (in Figures 2 and 4 these nets are shown by special hatching; in Figures 5 and 6 some fragments are shown by the same hatching; in Figure 1 it is shown by perpendicular lines 9, which graphically represent the net cells without regard to the scale). The support 2 has an arched guide 11 of radius  $R$ , and the frame 3 has

rollers 10 placed at its bottom. Thanks to these rollers the frame can be moved along the support. The monitor 1 has a handle 12. The frame 3 of the communicating tubes 4 and the nets 7 and 8 form a fire protection screen.

The vertical axis of rotation  $O_1$  of the monitor is shifted away from the vertical axis of rotation  $O_2$  of the fire protection screen towards the screen 3. Owing to the shift, a monitor operator is closer to the screen 3 and consequently more protected.

The support 2 connected with the monitor 1 is placed on the platform 13, which equipped with wheels 14 and motor 15. The fire protection screen 3 may be arranged so that a monitor operator will be protected from the front and the sides (Figure 2), or it may be arranged along the perimeter protecting a monitor operator from the front, the sides, the rear and from above (Figure 5 and 6). The nets 7 and 8 of the fire protection screens 3 may be wattled or perforated. In the former case, the diameter of the wire may vary in the range from  $0.1 \times 0.1$  mm -  $8.0 \times 8.0$  mm. The wire in diameters under 0.1 mm is not capable to resist mechanical tensions, whereas the use of wire in diameters over 3.0 mm leads to the increasing of weight of the screen, with the result that the apparatus loses its manoeuvrability. The size of the wattled net cells may vary in the range from  $0.1 \times 0.1$  mm -  $8.0 \times 8.0$  mm depending on the diameters of the wire. The net, that is exterior with regard to the monitor operator, may be made from thicker wire and with larger cell size.

The nets may be made of wire with the same diameters, and their cells may be uniform in size. The nets may be made using any wires, e.g. manufactured of metals (copper, brass or any other), ceramics or products of the powder metallurgy. The net may be made of fire proof plastic. The nets may be perforated or punched.

The fire protection screen, which includes two protective surfaces in the form of nets (the net 7, that is internal surface, and the net 8, that is external surface), can be made as a combination of surfaces in various types. For

example, the external surface may be made as net (wattled, perforated or punched), whereas the internal surface may be made of metal sheet, transparent fireproof polymer, which may be reinforced by metal net, or it may be made as compound one (e. g., it is a net on the level of the operator's eyes internal surface 7 is made in the form of a net, whereas the rest of it is the metal sheet).

The apparatus works as follows : at the fire water or any other liquid (water with surface-active substances, foam-generating solutions, etc.) through the communicating tubes ( not shown on the Fig.) is supplied to the monitor 1 and through the system of tubes 4 is further supplied to the sprayers 5. A powerful jet of water is supplied to the fire-core by means of the monitor, and simultaneously the liquid is sprayed by means of the sprayers 5 in the space between the nets 7 and 8. The liquid, sprayed by the sprayers, and vapour, generating as a result of interaction of the heat flow and sprayed water drops, create in the space between the nets a vapour-drop-air medium, which effectively reflects and absorbs the heat flows and therefore, ensures the safe working condition for the monitor operator. Additionally, a silhouette visibility of the situation at the fire-site is ensured.

Apart from self-controlling increase in attenuating of heat flow, a regulated attenuation by means of existing methods (computer systems of automatic regulation or manual methods of regulations) is ensured.

This kind of regulation can be achieved by placing the heat sensors with spectral diapason including a visible and infrared spectrum of radiation in front of the protecting screen.

During the fire computers systems constantly receives information the sensors, and introduces necessary corrections in the number of sprayers, water pressure and the quantity of foam supplied into the space between the nets.

This regulation of the protecting qualities of the screen may be effected by the monitor operator themselves by the existing methods.

When the protecting screen 3 is placed on rollers, it makes it possible to turn it around vertical axis  $O_2$  and to fix it in the desired direction by means of a handle 12.

The same handle allows the vertical movement of the monitor in accordance with the desired angle with regards to the horizon to supply the cooling liquid to the desired distance.

A combined curtain is used to safeguard the life of people at the places with the concentration of large number of people, e.g. specific anti-fire curtain at theatres. In this case, the curtain, the first on the side of the stage is formed by the two surfaces and water sprayed between them; the second curtain is formed by supplying foam into the space between the second and third surfaces. In this case, a step-by-step attenuation of the powerful heat and gas flows at strong fire on the stage. The vapour-drop-air curtain, next to fire, is the first to reduce the heat flows and protect the next foam curtain against destructive impact of heat. All aforementioned allows to increase the efficiency and longevity of this combined curtain at extreme situations, e.g. in the moment prior to the evacuation of people from the theatre hall; it also allows to stop the penetration of toxic gases into the theatre hall.

### **Bibliography.**

1. Predvaritelnyi patent Respubliki Uzbekistan N 5193, MPK A 62 S 2/02, 1998.
2. A.s. SSSR No 1666129, MPK A 62 S 31/00, 1991.
3. Predvaritelnyi patent Respubliki Uzbekistan N 4665, MPK A 62 S 31/00, 1997.
4. Paji D.G., Galustov V.S. Osnovy tekhniki raspylivaniya jidkosti. – M., Khimiya: 1984, (256 s.).

5. Morozuk Yu.V. – Obespechenie bezopasnosti pozharnikh machin ot vozdeistviya teplovogo oblucheniya pojarov lesoskladov kapelnoy vodyanoi zachitoy. – Diss, na soiskanie zvaniya k.t.n. , VIPTSh MVD RF. M., 1994.-243 str.
6. Roitman M.Ya. Protivopozharnoe normirovanie v stroitel'stve, M., Stroiizdat, 1985. 590 s.
7. Alexandrov E.E., Stenchikov G.L., Chislennoe modelirovanie klimatichekogo effecta aerazol'nogo zagryaznenia atmosphery. Dokl. AN SSSR, 1985, t.282, N 6, ss. 1324-1326.

**Claims:**

1. A method for attenuating a heat flow, which comprises forming a curtain of cooling liquid by supplying it in space formed of at least two surfaces with at least one of that is made as net, whose distinguishing feature is that the cooling liquid is supplied by means of controlled sprinkling or controlled spraying into the said space in order to form a vapour-drop-air medium between the said surfaces and the cooling liquid films on the said surfaces.
2. A method as claimed in claim 1, whose distinguishing feature is that a foam is used in addition when the number of curtains is more than one.
3. An apparatus for protecting of a monitor operator comprising a sprinkling assembly placed on the support attached to monitor casing and made in form of a frame of communicating tubes with the openings; the tubes are placed vertically and horizontally, wherein in the central part of the frame there is a aperture for the monitor; the sprinkling assembly is equipped by the two surfaces, at least one of the surfaces is made in the form of a net; theses surfaces are attached on both sides of the frame at certain interval from each other, whose distinguishing feature is that there are sprayers for the fine dispersion of the cooling liquid, mounted in the openings of the tubes of the frame with an aim of forming a vapour-drop-air medium in the space between the surfaces and films of cooling liquid on the surfaces
4. An apparatus as claimed in claim 3, whose distinguishing feature is that the nets are wattled and/or perforated and/or punched.
5. An apparatus as claimed in claim 3 and 4, whose distinguishing feature is that the nets are made of powder metallurgy products.
6. An apparatus as claimed in claim 3 and 4, whose distinguishing feature is that the nets are made of fireproof plastic.
7. An apparatus as claimed in claim 3 and 4, whose distinguishing feature is that the nets are made of cooper.

8. An apparatus as claimed in claim 3 and 4, whose distinguishing feature is that the nets are made of a material coated by a metal film.
9. An apparatus as claimed in claim 3 and 4, whose distinguishing feature is that the nets are made of galvanized steel.
10. An apparatus as claimed in claim 3, whose distinguishing feature is that the interval between the frame and the protective surfaces is 1-200 mm.
11. An apparatus as claimed in claim 3, whose distinguishing feature is that the frame is arranged at the forward part of the monitor and on its lateral parts.
12. An apparatus as claimed in claim 3, whose distinguishing feature is that the frame is arranged along the perimeter the monitor, and, if need be, at the ceiling and the floor.



PCT/UZ/00/00001

**The Method for attenuating a heat flow and apparatus for protecting a monitor operator**

*Abstract*

The invention relates to fire-prevention equipment and may be applied for the protection of the equipment and people during fighting a fire, for dividing the area of buildings, ground and underground structures and apparatus into fire-checking section, preventing the fall of ceilings and intermediate floors, and stopping the spread of large fires destroying the environment. The objective of the present invention is to provide a higher efficiency method of attenuating energy flow in the form of light, heat and convective gas flows and designing of an apparatus attachable to the fire monitor for the forming of a protecting screen against thermal radiation, safe, convenient and reliable; and allowing to protect from light spectre radiation and convective gas flows. The method envisages the creation of curtain from a cooling liquid that is sprayed into the space between the surfaces. When more than one curtain is formed, a combined supply of cooling liquid is used. One of the curtains is made by spraying the liquid, whereas the others by supplying foam. The apparatus consists of a frame, a sprinkling assembly and nets attached at interval to the both sides of the frame. In the openings of the frame is equipped by sprayers.

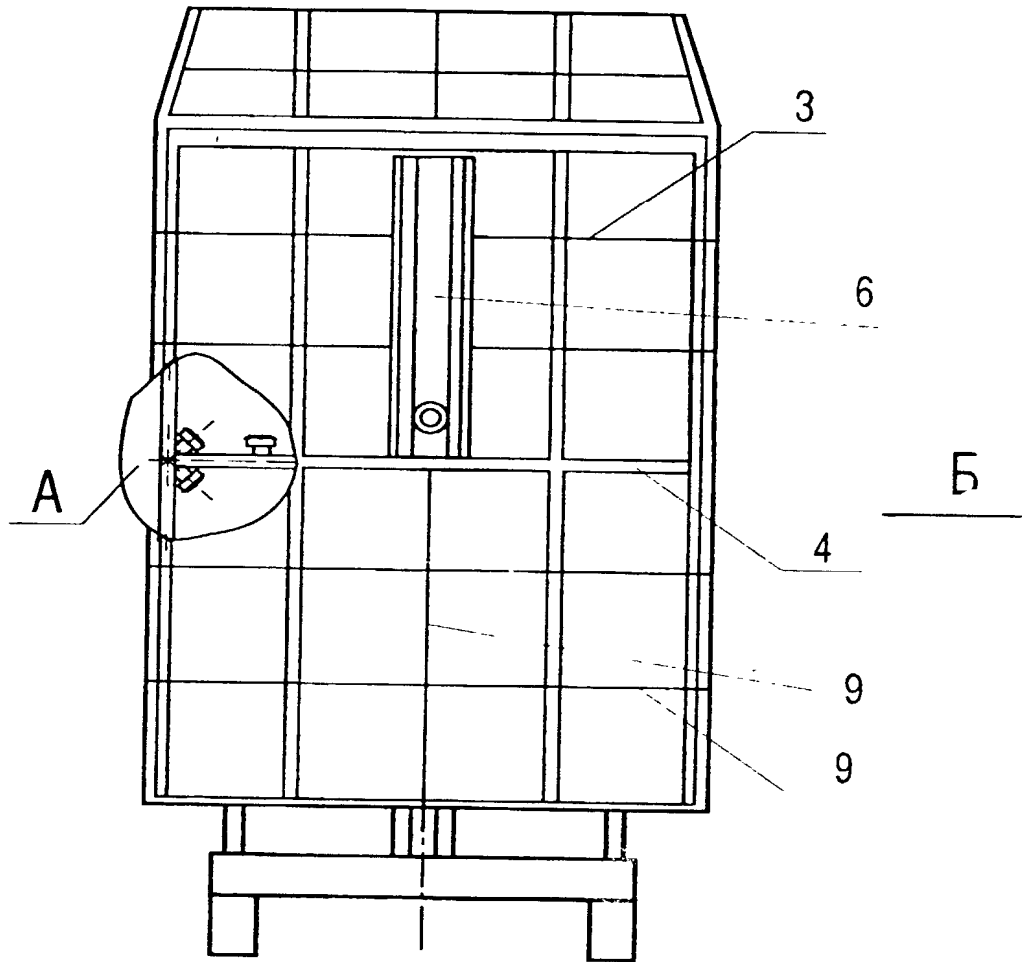


Fig 1

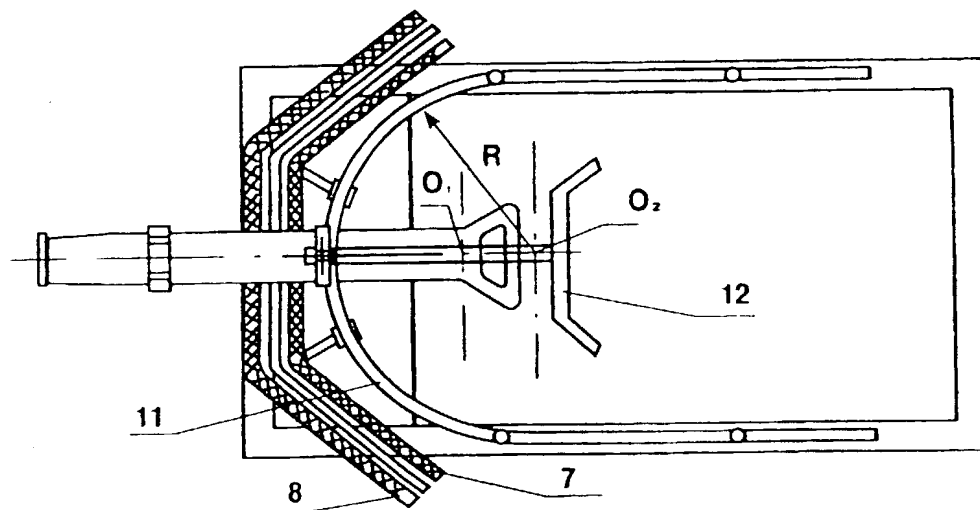


Fig 2

A

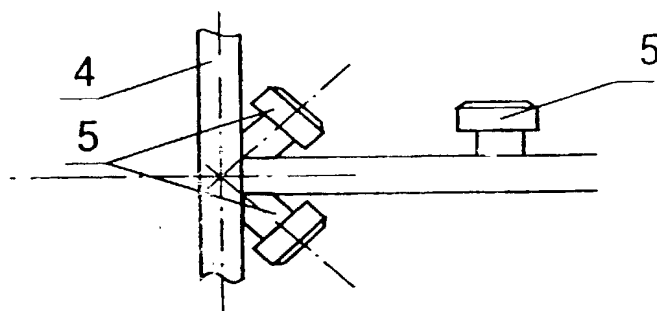


Fig 3

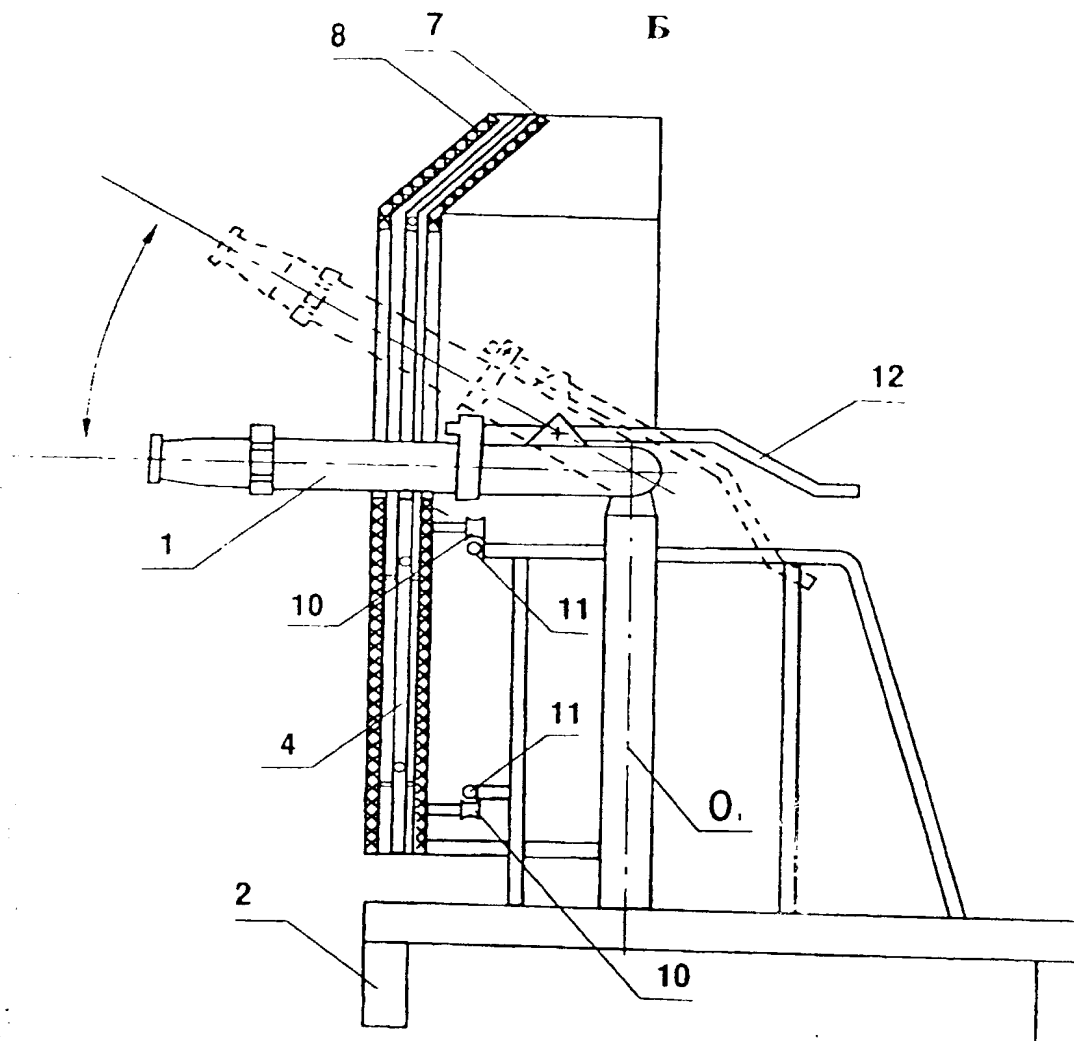


Fig 4

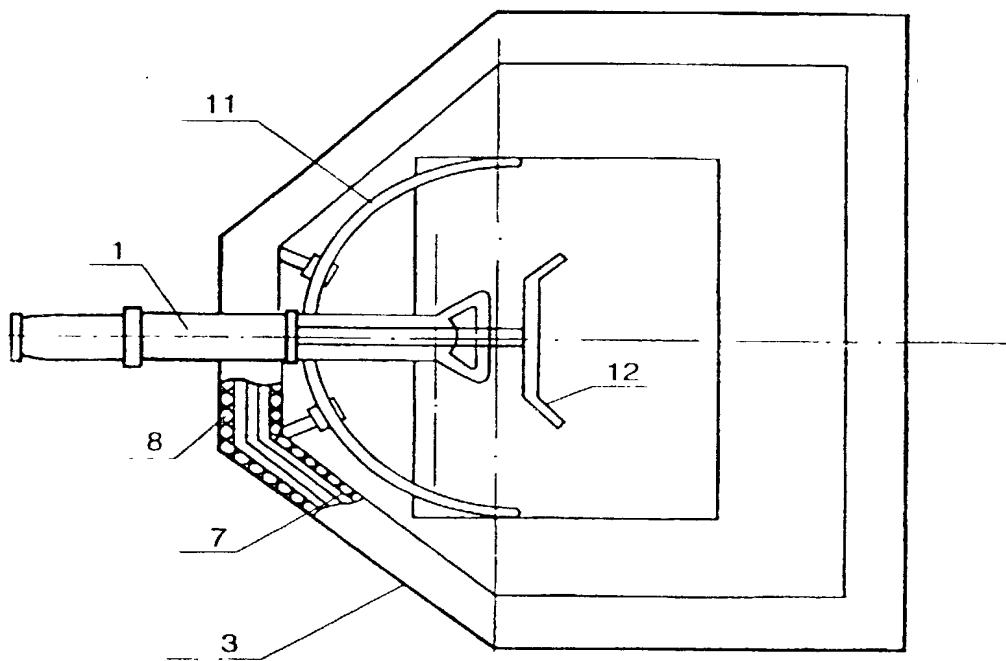


Fig 5

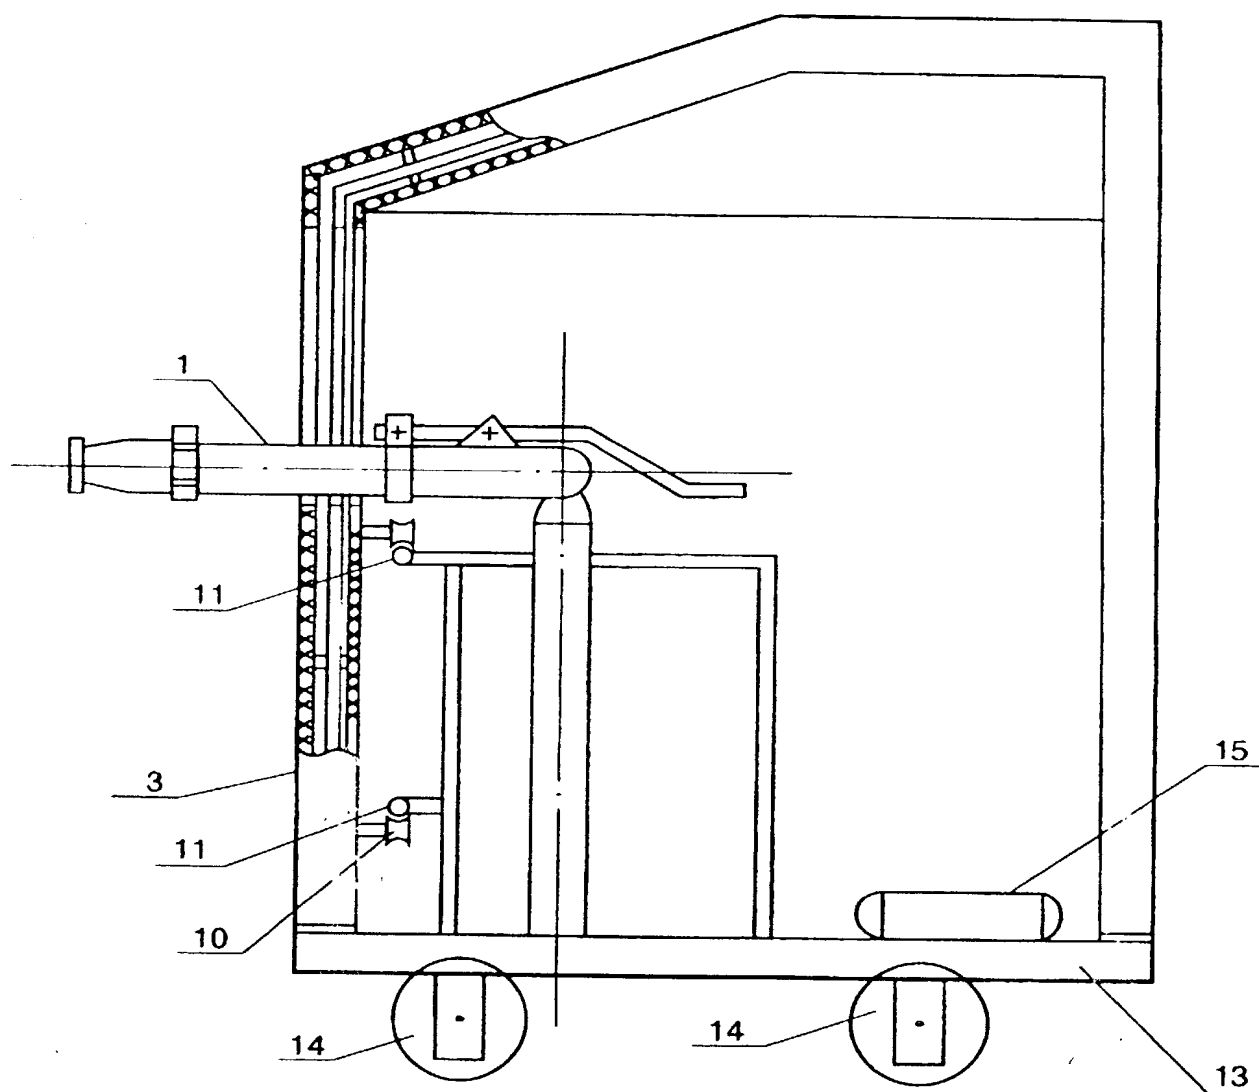


Fig 6

## UNITED STATES


 UTILITY PATENT APPLICATION  
 DECLARATION AND POWER OF ATTORNEY - ORIGINAL APPLICATION

 ATTORNEY'S DOCKET NO.  
 205,383

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name:

I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the invention entitled

(1) METHOD FOR ATTENUATING A HEAT FLOW AND APPARATUS FOR PROTECTING A MONITOR OPERATOR

INVENTION

the specification of which

 (2) CHECK  
 APPROPRIATE  
 BOX

 (2) ☐ is attached hereto.

☒ was filed on April 25, 2000 as Application No. PCT/UZ00/00001

and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge my duty to disclose information of which I am aware which is material to the patentability of this application under 37 CFR 1.56(a): the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application; and as to applications for patents or inventor's certificate on the invention filed in any country foreign to the United States prior to this application by me or my legal representatives or assigns.

 (3) CHECK  
 APPROPRIATE  
 BOX

 (3) ☐ no such applications have been filed, or

☒ such application(s) have been filed as follows:

 (4) COMPLETE  
 DATA  
 INDICATED  
 IF  
 APPLICABLE

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED WITHIN 12 MONTHS PRIOR TO THIS APPLICATION				
Country	Application Number	Date of Filing (day, month, year)	Date of Issue (day, month, year)	Priority Claimed Under 35 USC 119
(4) Uzbekistan	UZ IHDP 9900324.1	05/05/1999		x Yes <input type="checkbox"/> No
				<input type="checkbox"/> Yes <input type="checkbox"/> No
				<input type="checkbox"/> Yes <input type="checkbox"/> No
ALL FOREIGN APPLICATIONS, IF ANY, FILED MORE THAN 12 MONTHS PRIOR TO THIS APPLICATION				
(4)				

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

 (5) COMPLETE  
 DATA INDICATED  
 IF APPLICABLE

 (5) \_\_\_\_\_  
 (Application Serial No.) (Filing date) (Status: patented, pending, abandoned)

 (5) \_\_\_\_\_  
 (Application Serial No.) (Filing date) (Status: patented, pending, abandoned)

Power of Attorney: As a joint inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Jeffrey A. Schwab, Registration Number 24,490  
 Thomas E. Spath, Registration Number 25,928  
 Jay S. Cinamon, Registration Number 24,156  
 Joseph J. Catanzaro, Registration Number 25,837

Howard R. Jaeger, Registration Number 31,376  
 Abigail F. Cousins, Registration Number 29,292  
 Anthony Coppola, Registration Number 41,493  
 Alan D. Gilliland, Registration Number 26,549

Send correspondence to:

ABELMAN, FRAYNE & SCHWAB  
 150 East 42<sup>nd</sup> Street  
 New York, New York 10017-5612

Direct telephone calls to:

Jeffrey A. Schwab, Thomas E. Spath,  
 Jay S. Cinamon, Howard R. Jaeger,  
 Joseph J. Catanzaro, Abigail F. Cousins,  
 Alan D. Gilliland or Anthony Coppola  
 at (212) 949-9022

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(6) DETAILS  
 REQUIRED  
 FOR EACH  
 INVENTOR

Full Name of Sole or First Inventor <u>Miryali Khamitovich USMANOV</u>	Inventor's Signature <u>[Signature]</u>	Date <u>16.04.2002</u>
Residence Republic of Uzbekistan, 700074, Tashkent, Baysunskaya Str., 109		Citizenship Uzbekistan
Post Office Address Same as above		
Full Name of Second Joint Inventor, If Any <u>Nikolai Nikolaevich BROUSHLINSKI</u>	Inventor's Signature <u>[Signature]</u>	Date <u>22.04.2002</u>
Residence Russian Federation, 125239, Moscow, <u>Boulevard Matroza-Geleznjaka</u> , h.19, ap.135		Citizenship Russian
Post Office Address Same as above		
Full Name of Third Joint Inventor, If Any <u>Rustem Alievich ABLYAZIS</u>	Inventor's Signature <u>[Signature]</u>	Date <u>17.04.2002</u>
Residence Republic of Uzbekistan, 700164, Tashkent, <u>D.Abidova Str.</u> , 13a, ap.12		Citizenship Uzbekistan
Post Office Address Same as above		
Full Name of Fourth Joint Inventor, If Any <u>Yusup Uktamovich KASIMOV</u>	Inventor's Signature <u>[Signature]</u>	Date <u>17.04.2002</u>
Residence Republic of Uzbekistan, 700093, Tashkent, Massiv Yunus-Abad, kvartal 5, h.11, ap.31		Citizenship Uzbekistan
Post Office Address Same as above		
Full Name of Fifth Joint Inventor, If Any <u>Nikolai Petrovich KOPYLOV</u>	Inventor's Signature <u>[Signature]</u>	Date <u>23.04.2002</u>
Residence Russian Federation, 143900, Moscow Region, <u>Balashiha</u> , VNIPO, H.3, AP.50		Citizenship Russian
Post Office Address Same as above		
Full Name of Seventh Joint Inventor, If Any <u>Nikolai Borisovich LOBANOV</u>	Inventor's Signature <u>[Signature]</u>	Date <u>16.04.2002</u>
Residence Republic of Uzbekistan, 700085, Tashkent, <u>Massiv Sergeli-7</u> , h.30, ap.14		Citizenship Uzbekistan
Post Office Address Same as above		

ABELMAN, FRAYNE & SCHWAB

150 East 42<sup>nd</sup> Street, New York, New York 10017-5612

Page 2 of 3



Power of Attorney: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Jeffrey A. Schwab, Registration Number 24,490  
 Thomas E. Spath, Registration Number 25,928  
 Jay S. Cinamon, Registration Number 24,156  
 Joseph J. Catanzaro, Registration Number 25,837





Howard R. Jaeger, Registration Number 31,376  
 Abigail F. Cousins, Registration Number 29,292  
 Anthony Coppola, Registration Number 41,493  
 Alan D. Gilliland, Registration Number 26,549

Send correspondence to:  
 ABELMAN, FRAYNE & SCHWAB  
 150 East 42<sup>nd</sup> Street  
 New York, New York 10017-5612

Direct telephone calls to:  
 Jeffrey A. Schwab, Thomas E. Spath,  
 Jay S. Cinamon, Howard R. Jaeger,  
 Joseph J. Catanzaro, Abigail F. Cousins,  
 Alan D. Gilliland or Anthony Coppola  
 at (212) 949-9022

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


(6) DETAILS  
 REQUIRED  
 FOR EACH  
 INVENTOR

Full Name of Eighth Joint Inventor, If Any <b>7-00</b> <u>Shamil SADIKOV</u>		Inventor's Signature X 	Date <u>16.08.2001</u>
Residence Republic of Uzbekistan, 700113, Tashkent, Massiv Chllanzar, kvartal 8, h.6-a, ap.13 <b>UZX</b>		Citizenship Uzbekistan	
Post Office Address Same as above			
Full Name of Ninth Joint Inventor, If Any <b>8-00</b> <u>Evgeny Alexandrovich SEREBRENNIKOV</u>		Inventor's Signature X 	Date <u>22.04.2002</u>
Residence Russian Federation, 103064, Moscow, <u>Mashkova</u> Str., h.9, ap.78 <b>UZX</b>		Citizenship Russian	
Post Office Address Same as above			
Full Name of Tenth Inventor, If Any <b>9-00</b> <u>Matrasul SABIROV</u>		Inventor's Signature X 	Date <u>17.04.02</u>
Residence Republic of Uzbekistan, 700100, Tashkent, <u>Al-Farg'onaly</u> Str., h.6 <b>UZX</b>		Citizenship Uzbekistan	
Post Office Address Same as above			
Full Name of Eleventh Joint Inventor, If Any <b>10-00</b> <u>Anvar Davlyatovich KHUDOEV</u>		Inventor's Signature X 	Date <u>18.04.02</u>
Residence Republic of Uzbekistan, 700100, Tashkent, <u>Hurshid</u> Str., h.1-a, ap.51 <b>UZX</b>		Citizenship Uzbekistan	
Post Office Address Same as above			
Full Name of Twelfth Joint Inventor, If Any		Inventor's Signature	Date
Residence		Citizenship	
Post Office Address			
Full Name of Fourteenth Joint Inventor, If Any		Inventor's Signature	Date
Residence		Citizenship	
Post Office Address			

ABELMAN, FRAYNE & SCHWAB

150 East 42<sup>nd</sup> Street, New York, New York 10017-5612

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

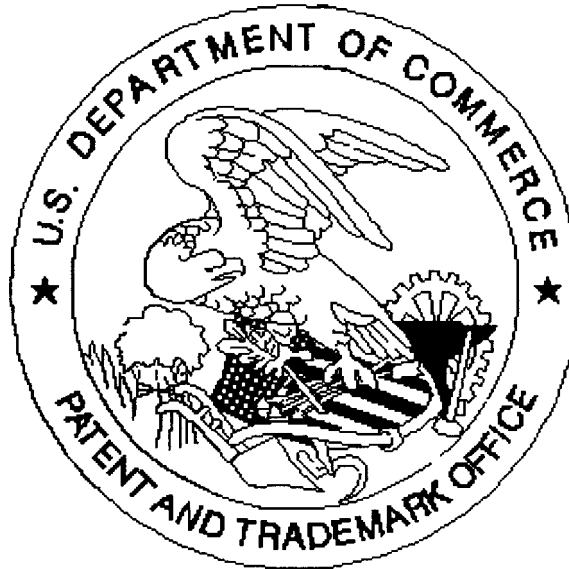

Application deficiencies found during scanning:

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

*There are 5 sheets of drawings, not 6 sheets.*

☐ ***Scanned copy is best available.***